



AUTOMATIC TRANSMISSION FLUSH



Product ID: 80049

Product description

Automatic Transmission Flush is a flushing oil with highly effective cleaning agents to clean the automatic transmission (AT) system, restore performance and enable the fresh oil to perform optimally.

Benefits

- ✓ Cleans and flushes the automatic transmission system
- ✓ Eliminates varnish, contamination and wear deposits
- ✓ Restores automatic transmission system condition enabling the fresh oil to perform optimally
- ✓ Smoothens and quietens gear operation
- ✓ Improves and eases shifting
- ✓ Prolongs automatic transmission (AT) and Automatic Transmission Fluid (ATF) life
- ✓ Does not contain aggressive solvents

Usage

Compatible with all automatic transmission fluids including CVT and DCT.

Direction

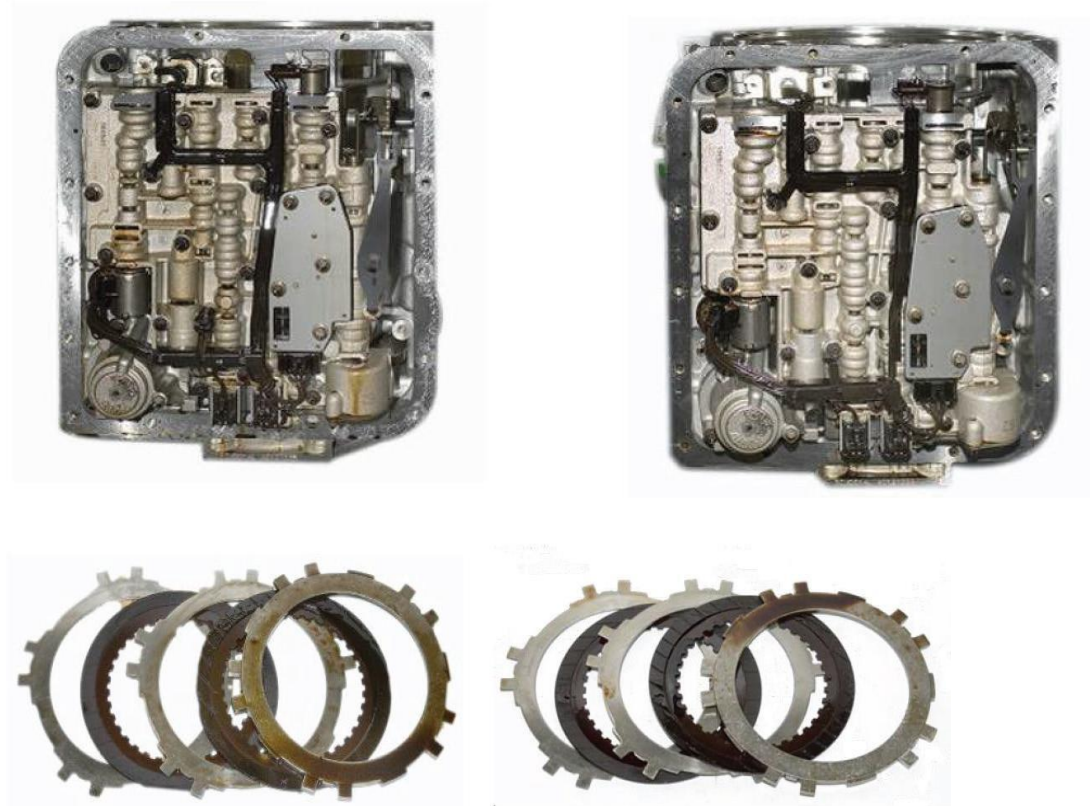
For professional use. Ideal for use with an ATF flushing machine. Add to the automatic gearbox before changing the transmission fluid.

1. Make sure the engine and transmission system are warm and at regular operating temperature before starting the flushing procedure.
2. Connect the automatic transmission flushing machine (if available).
3. Add the required contents (see dosage below) of one bottle into the automatic transmission flushing machine and let the flushing machine add the Automatic Transmission Flush additive. Add manually into the AT system (if possible) if no flushing machine is available.
4. Let the engine run for 10-15 minutes while shifting through all gears to circulate flush and clean the AT-system.
5. Flush out the old ATF and flushing fluid and refill the automatic transmission with new ATF.
6. Use recommended ATF only when refilling.
7. Always follow the manufacturer's instructions when draining, flushing and refilling the transmission fluid.

Important: Always check whether the ATF level is correct after finishing the procedure and make sure the oil level never exceeds the maximum oil level in the automatic transmission system during operation.

Dosage

Recommended for use at 5% by volume. One 500 ml bottle treats 8 - 12 litres of ATF.

**Results****Before****After****Technical specification**

Density g/cm ³ :	0,870
Colour:	Slightly yellow
Viscosity @ 40°C:	15.8 mm ² /s
Viscosity @ 100°C:	3.5 mm ² /s
Viscosity index:	95
Pour point:	0 °C

The information in this sheet is correct and true to the best of our knowledge, but any recommendations or suggestions made in this sheet are made without guarantee since the conditions of use are beyond our control. We do not accept responsibility for damage as a consequence of incompleteness, negligence and/or inaccuracies in this information sheet. The above typical values do not constitute a specification nor does the information in this sheet imply any legally binding assurance of certain properties or of suitability for a specific purpose. All Terms of Sale of Technical Lubricants International B.V. are applied here. Updated 05/2024 V4